




RAPTOR[®] XT

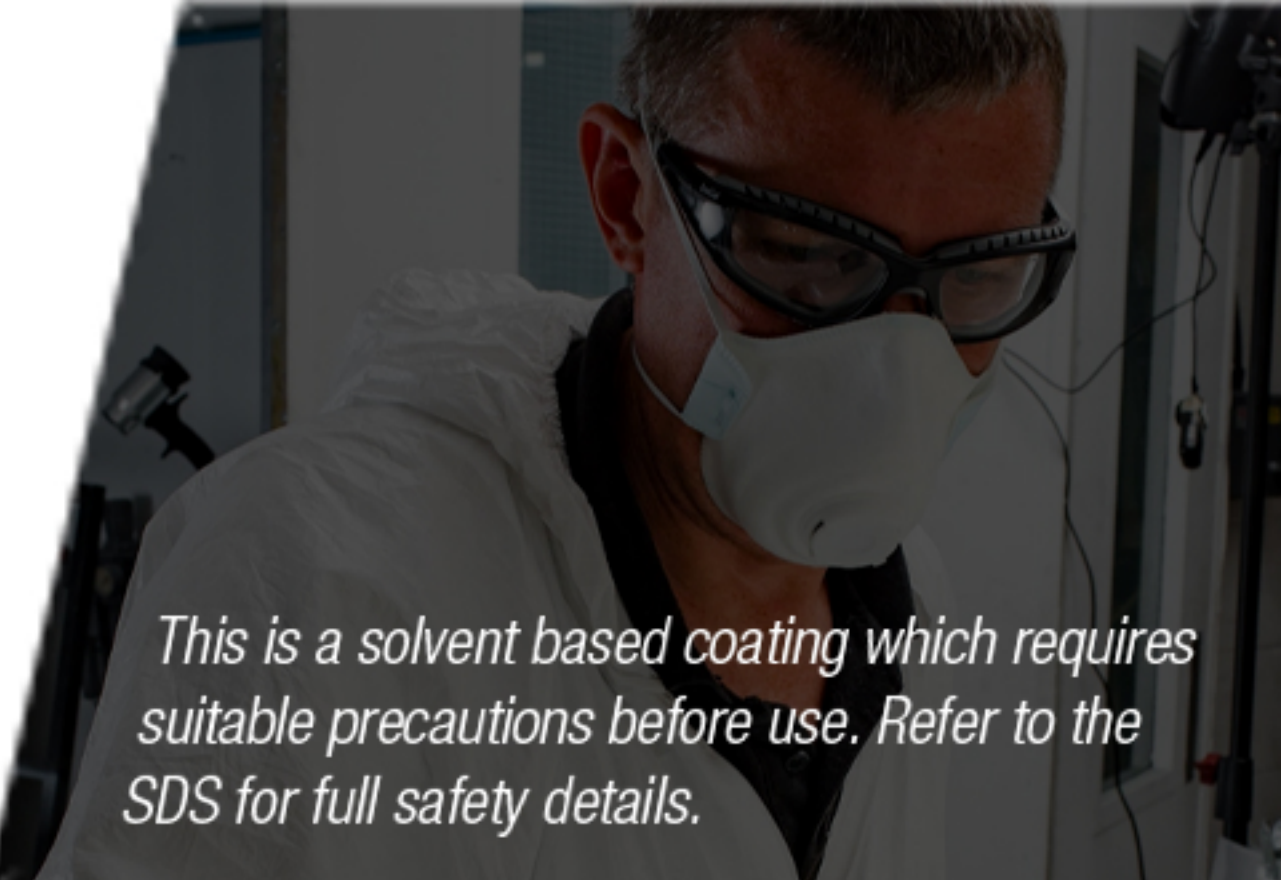


This is a solvent based coating which requires suitable precautions before use. Refer to the SDS for full safety details.

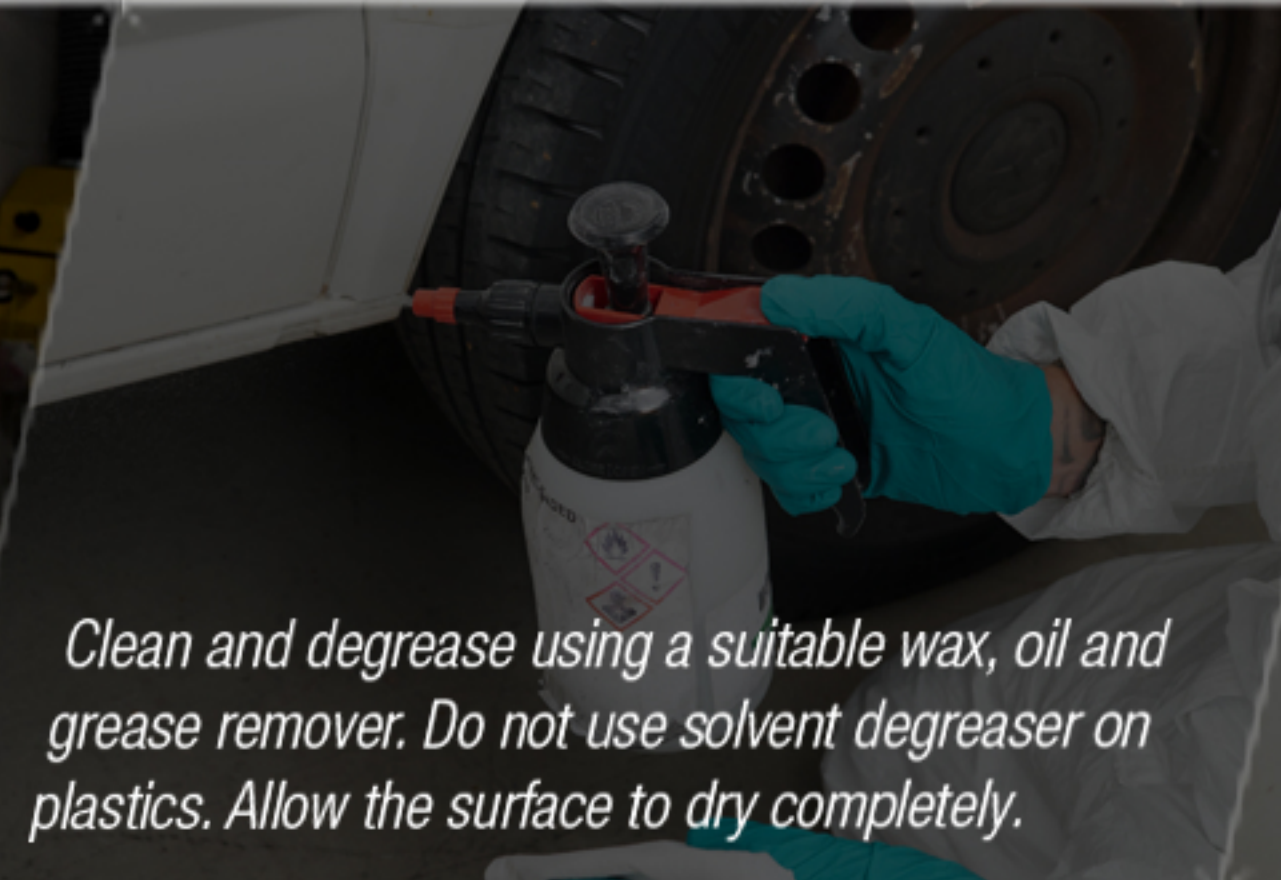


Clean and degrease using a suitable wax, oil and grease remover. Do not use solvent degreaser on plastics. Allow the surface to dry completely.

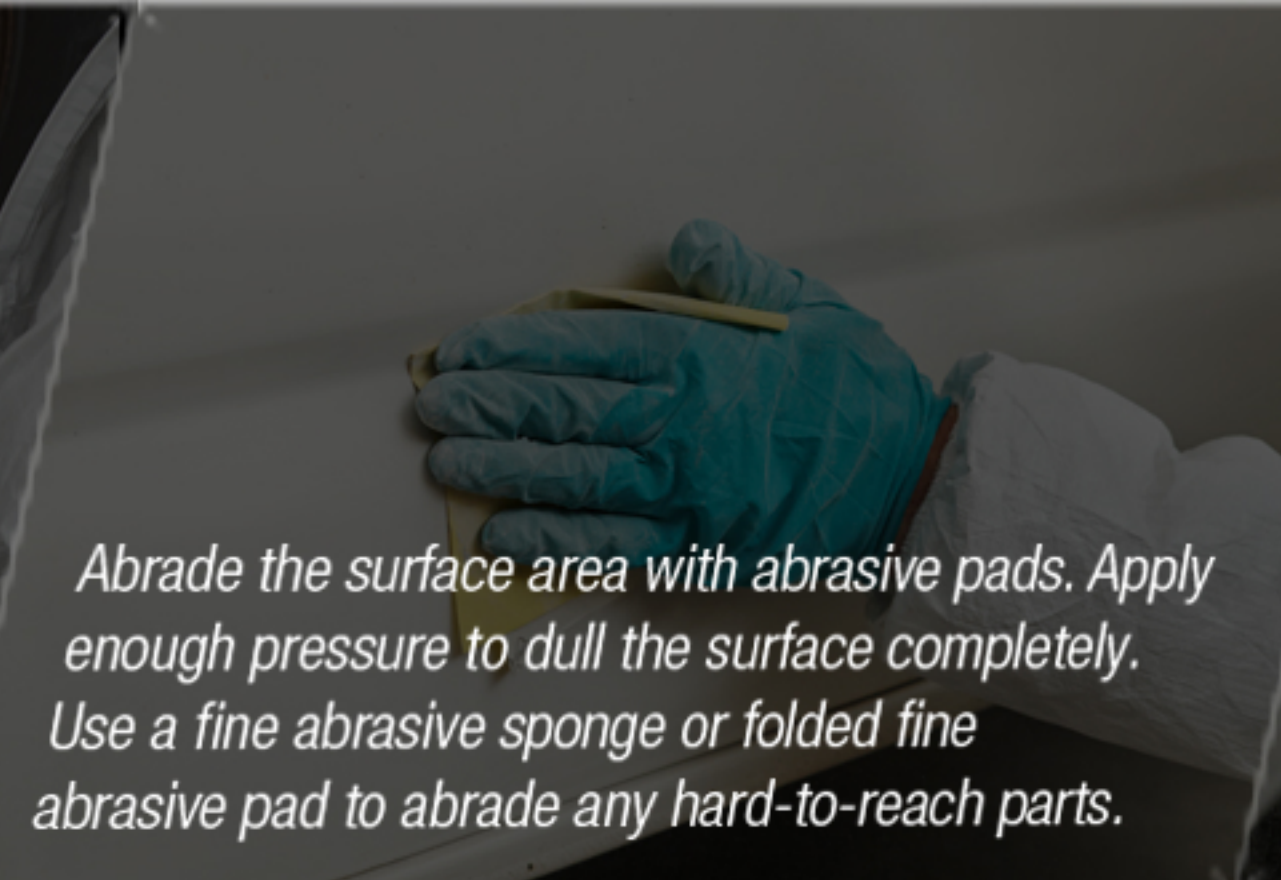


Abrade the surface area with abrasive pads. Apply enough pressure to dull the surface completely. Use a fine abrasive sponge or folded fine abrasive pad to abrade any hard-to-reach parts.

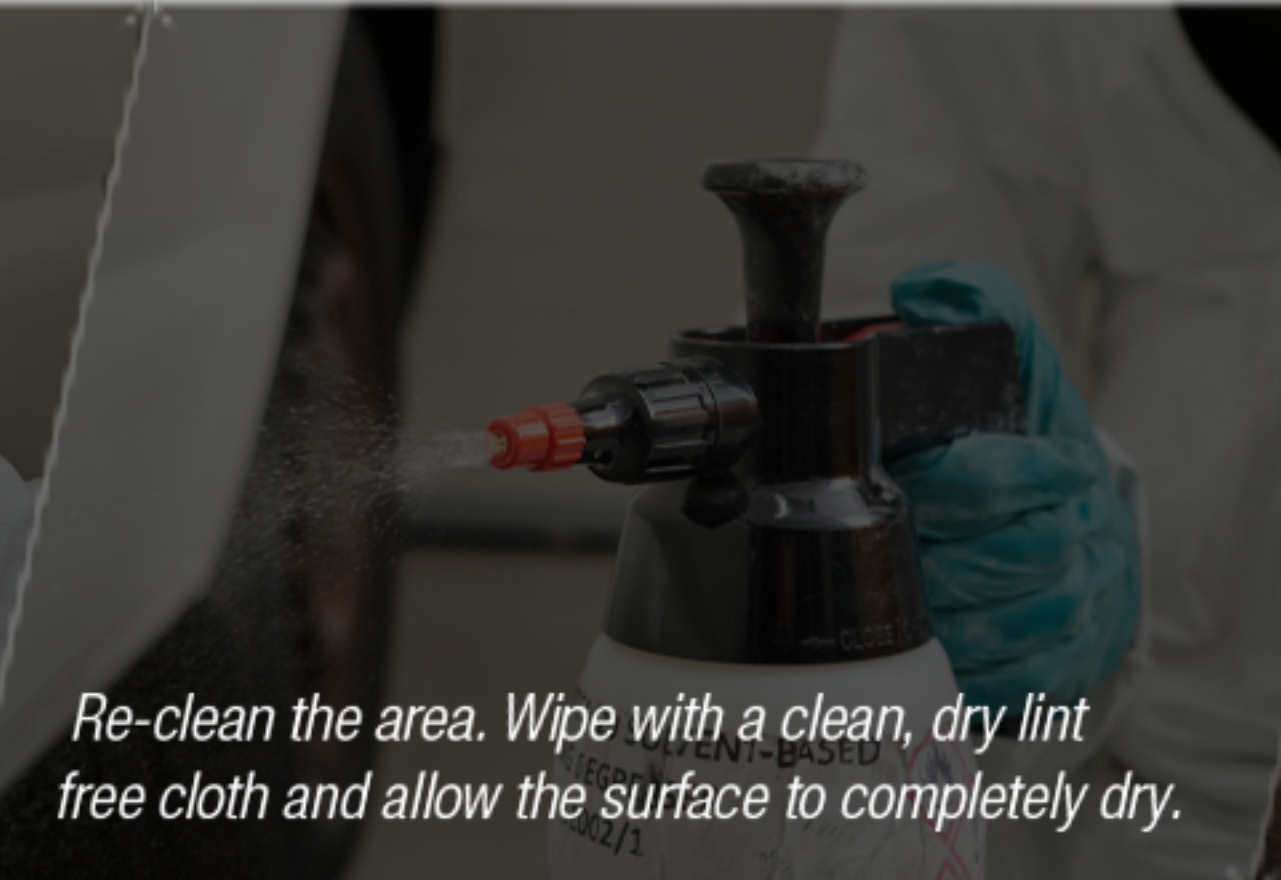


Re-clean the area. Wipe with a clean, dry lint free cloth and allow the surface to completely dry.




Mask any areas that won't be painted with suitable masking tape and thick paper / plastic sheeting. Mask approx. 1m further than painting area.

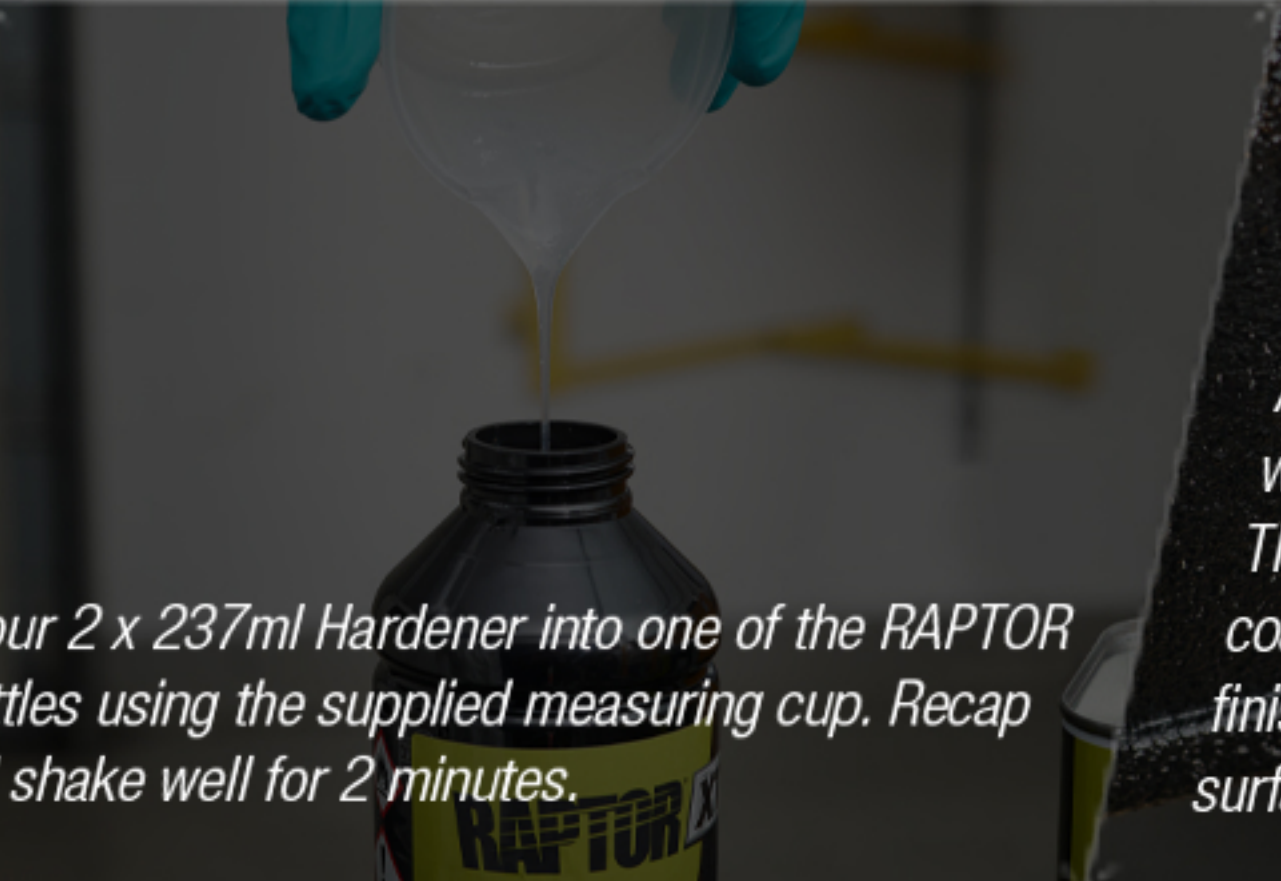


Pour 2 x 237ml Hardener into one of the RAPTOR bottles using the supplied measuring cup. Recap and shake well for 2 minutes.

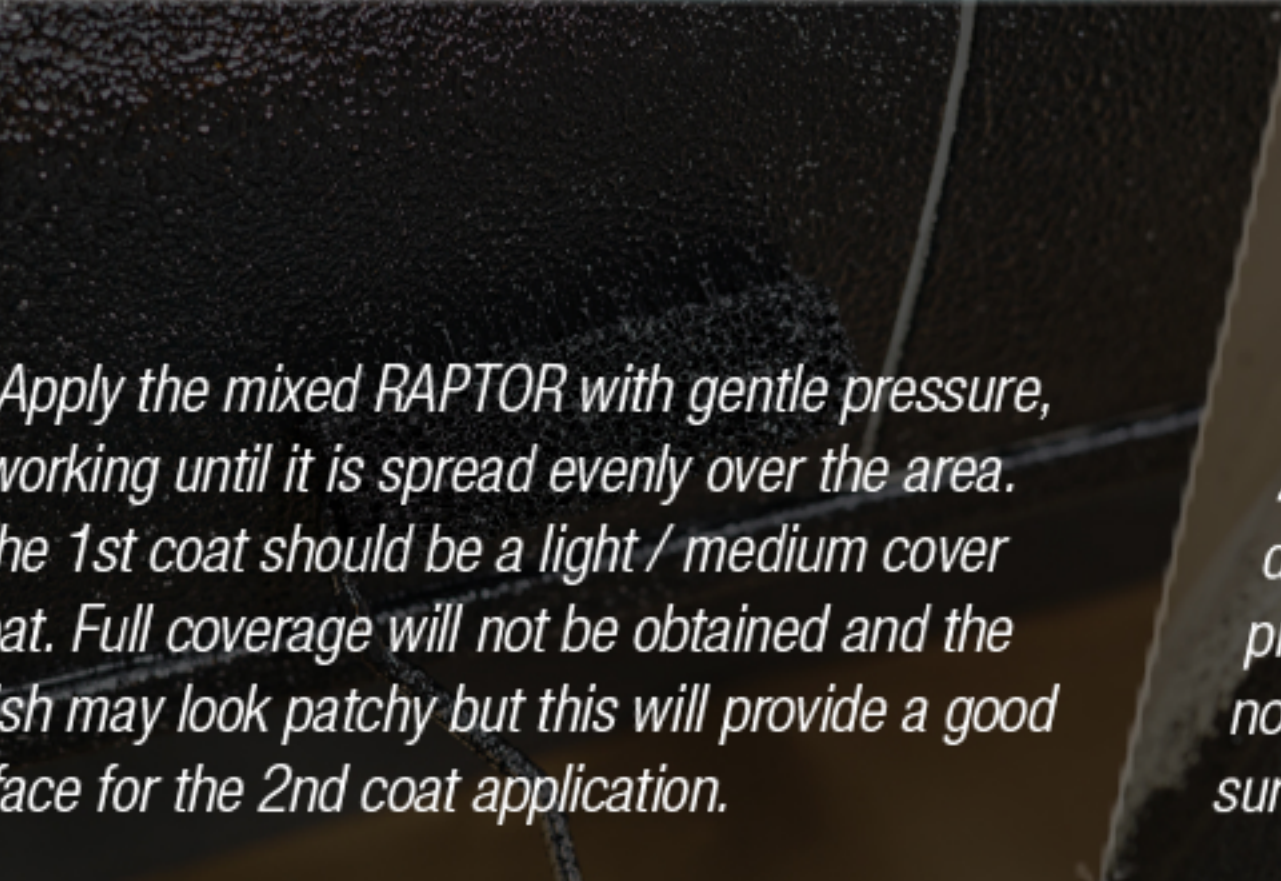


Apply the mixed RAPTOR with gentle pressure, working until it is spread evenly over the area. The 1st coat should be a light / medium cover coat. Full coverage will not be obtained and the finish may look patchy but this will provide a good surface for the 2nd coat application.

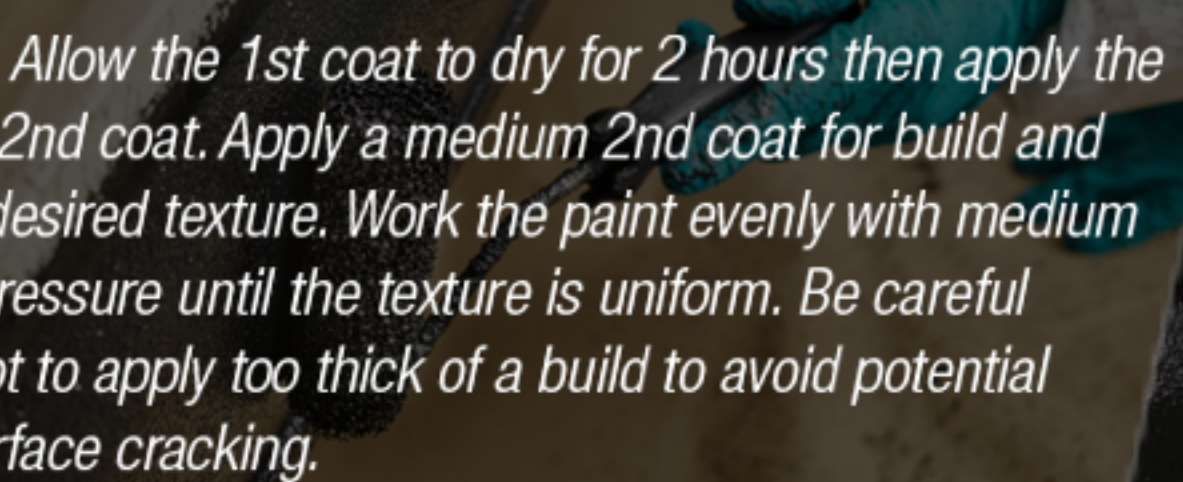

Allow the 1st coat to dry for 2 hours then apply the 2nd coat. Apply a medium 2nd coat for build and desired texture. Work the paint evenly with medium pressure until the texture is uniform. Be careful not to apply too thick of a build to avoid potential surface cracking.

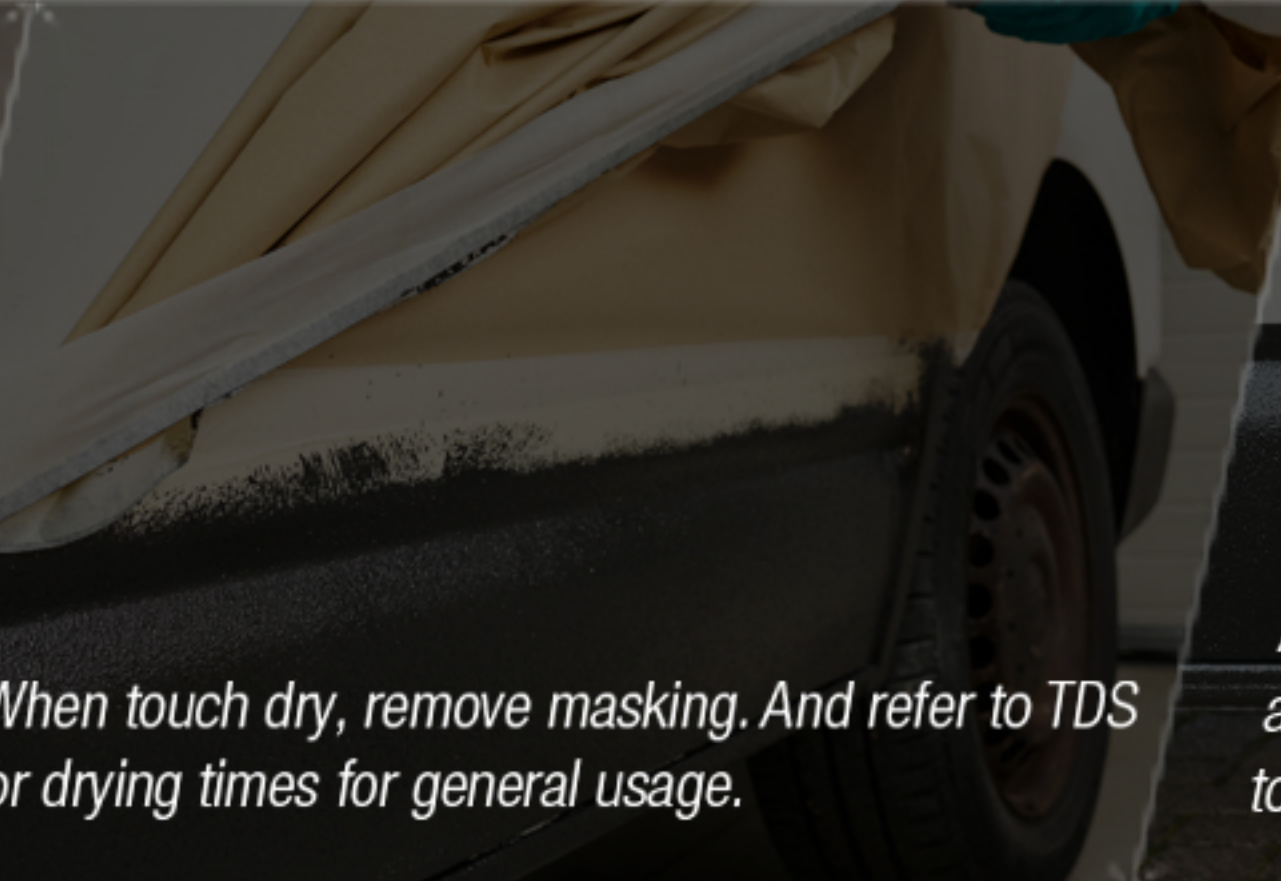

When touch dry, remove masking. And refer to TDS for drying times for general usage.



After RAPTOR is fully dry, enjoy your new vehicle and try not to distract the other drivers on the road too much.