


**halfords
essentials**

User Instructions

**Oryx
R129
Child Car Seat**

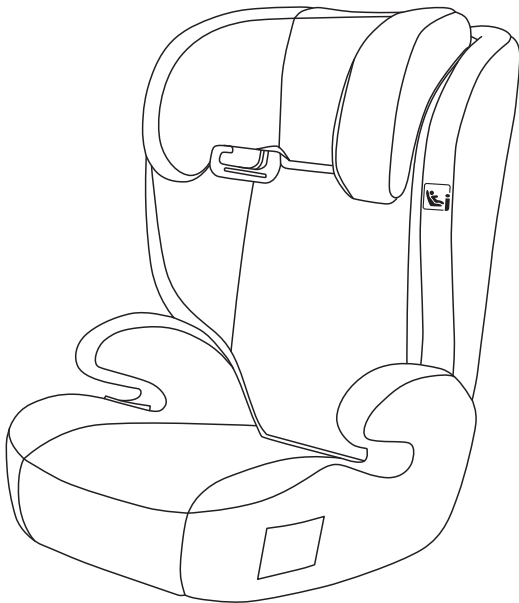

Child height: 100 - 150cm

Item Code: 819358

CONTENTS

1. Safety warnings	01
2. Structure name	02
3. Installation position	04
4. Seat assembly	05
5. Installation with adult safety belt (100-150cm)	06
6. Maintenance	08

WARNING



This is an i-Size booster seat enhanced child restraint system. It is approved according to UN Regulation No.129/03, for use primarily in "i-Size seating positions" as indicated by vehicle manufacturers in the vehicle user's manual. If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

IMPORTANT - DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 3 YEARS (Refer to instructions).

1. SAFETY WARNINGS


Thank you for purchasing our child seat. Please ensure you fully read and follow the instructions provided. Please retain instructions for future use. If you have any further questions please contact your local store.



- Before using, please read the instruction manual carefully. The product is a safety product and is only safe when used in accordance with the instruction manual.
- This car seat is compliant with ECE R129/03.
- Do not use a child seat if the vehicle seat is equipped with an active front air bag. This can be dangerous. This does not apply to side airbags.
- It is most important that the seat belt is correctly routed.
- Never make unauthorised modifications or changes to the product.
- Never use the child car seat if it has been in an accident, or if it has become badly worn.
- Do not leave your children in the seat unattended at any time.
- In hot weather the plastic and metal parts of the product may become hot. You should cover the seat when not in use, especially when your car is parked in the sun.
- Ensure that all luggage and objects likely to cause injury in the event of an accident are properly secured.
- Never use the child car seat without the cover. Only covers approved by the manufacturer can be used.
- The child car seat must be secured when not in use.
- Store this child car seat in a safe place when it is not being used. Avoid placing heavy objects on it.
- Most accidents occur on short trips. Therefore, do not be tempted to avoid using the seat simply because you are not travelling very far.
- Keep the plastic bag away from your child as it could cause suffocation.
- Do not expose the child seat to any corrosive substances. Use a wet towel to clean the plastic body of the child seat.
- Make sure the child car seat belt is adjusted to a suitable position and ensure the belt is not twisted.
- Please ensure the lap belt is worn low down across the pelvis.
- Do not use this product second hand as you may never know its history.
- The rigid items and plastic parts of a child restraint must be located and installed so that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.
- Ensure that the seat is not damaged by heavy luggage, movable seats or slamming the car door etc.
- This product is only suitable if the vehicle is fitted with 3-point retractor safety belts, approved to UN/ECE Regulation NO.16 or other equivalent standards.


2. STRUCTURE NAME



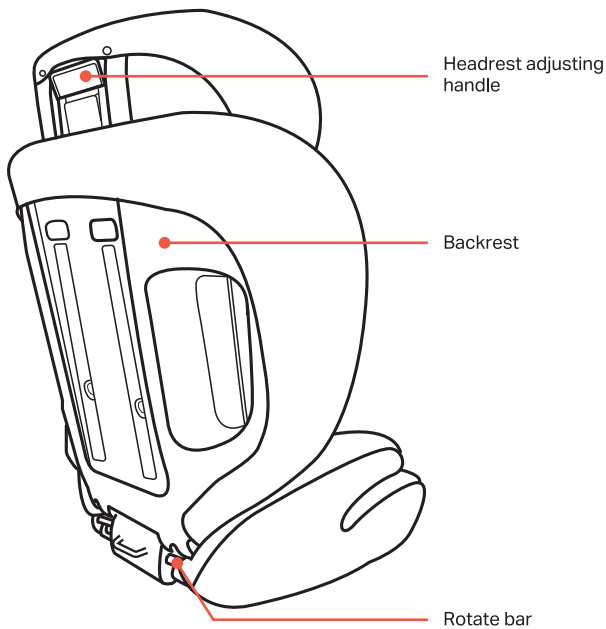

Take care of all parts. If any parts are missing please contact the retailer or manufacturer. The seat should not be used if any parts are damaged.

3. INSTALLATION POSITION

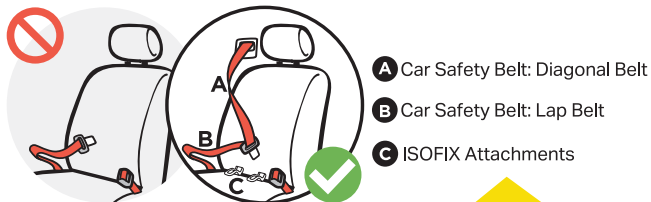

This car seat is suitable for conventional use in cars equipped with 3-point seat belts that are fitted in accordance with European Standard (ECE - 16 or equivalent standard). It is not suitable for cars only equipped with 2-point seat belts.



The suitable location for installation in the car are shown on the left:



(B) Do not install a child car seat.


(✓) Safe to install child car seat.

(A) Only suitable for use fitted with 3-point safety belts approved to ECE Regulation No.16 or other equivalent standards.




(B) Do not use this child seat in a passenger seat equipped with active airbags.

4. SEAT ASSEMBLY

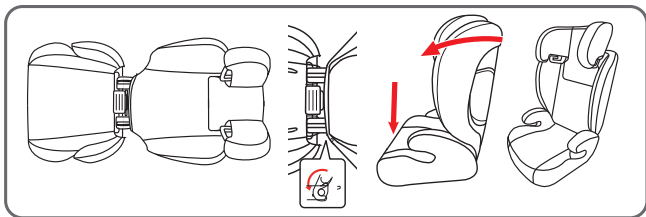

Seat assembly: Lay the seat flat as shown. Hook the backrest into the base and pull it forward until it is secured in an upright position.

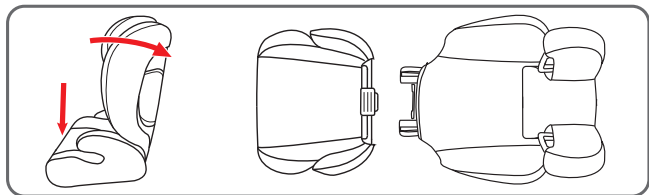


Backrest removal: To disconnect the backrest from the base, push down on the seat base with one hand, and push back on the headrest of the seat. Note you will need to push quite hard on the headrest to get it to unclip. Once the seat is flat, the base and backrest can be unclipped.

5. INSTALLATION WITH ADULT SAFETY-BELT (100-150CM).


Forward Facing:

Child height 100cm-150cm


i-Size Booster seat




Place the child safety seat in the car seat. Extend the car seat belt fully.



In order to adjust the headrest height there is an adjustment handle on the back of the headrest.



Squeeze and pull the handle up to lift the headrest up, or squeeze and push the handle down to lower the headrest. When adjusting the headrest, ensure it is locked in position after adjustment, you will hear it click.

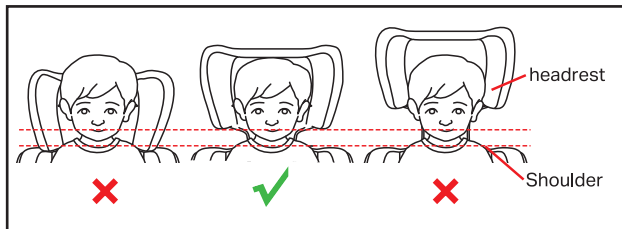


⚠ WARNING:


Please make sure the child's head is positioned in the middle of the headrest. Please make sure the headrest is locked when using this car seat.




Place your child in the seat. Adjust the headrest to a suitable height.



Take the adult seat belt, feed the diagonal belt through the shoulder belt guide as shown above. Pull the belt across the child as shown and then take both the diagonal and lap belts and pull under the armrest. The belt should not be touching your child's neck.



Insert the belt end into the buckle until you hear an audible click.




Remove any slack from the seat belt, always ensure it is not twisted.


6. MAINTENANCE

How to remove the seat cover for cleaning


Firstly, please disassemble the seat.



To remove the backrest cover, pull the cover off the seat, starting from the bottom and lifting upwards.



To remove the headrest cover, unfasten the snap fasteners and pull the cover over and off the headrest, start at the base and lift upwards.



To remove the cover from the booster cushion, starting at the rear of the seat, grip the fabric cover and pull it off the seat.

To reattach the cover, follow reverse instructions for removing the cover.

Cleaning cloth cover

The cover and plastic parts of the child seat can be cleaned with a wet cloth using a mild detergent and warm water. Ensure no soap gets into the buckle or adjusters. Do not use chemical cleaners or bleach on any part of the car seat. Dry thoroughly before use.



CONTACT US

UK: Halfords Ltd, B98 0DE
www.halfords.com

ROI: Halfords c/o DWF, Dublin 1
www.halfords.ie

Item Code: 819358